


421308

Technical Specification

## Woodhead LED Emergency Downlight 3W 6000K Open Area Self Test - White

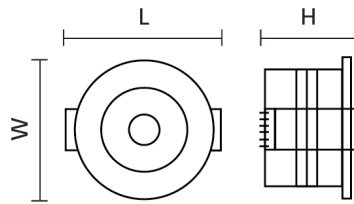

### General data

<b>Technology</b>	LED
<b>Mounting options</b>	Ceiling
<b>Install Options</b>	35mm Cut Out
<b>Install Connector Type</b>	Flying Lead
<b>Operating Temperature Range</b>	0 - +30 °C
<b>Warranty</b>	5 Years

### Optical data

<b>Colour Temperature</b>	6000 K
<b>CRI</b>	70 Ra
<b>Beam Angle</b>	110 °
<b>Photometry Available Tested @</b>	Yes

25°C

---

## Electrical data

Wattage +/-10% 3 W

---

## Lifetime data

Lifespan L70 B50 @25°C 30000 Hrs

---

## Emergency data

Battery Type LiFeP04

---

Battery Capacity 1800mAh

---

Battery Warranty 2 Years

---

Recharge Time 24 Hours

---

Emergency Type Non-Maintained

---

Test Procedure Self Test

---

Emergency Duration 3 Hours

---

Emergency Output 150 lm

---

## Physical Data

Housing Colour White RAL9016

---

Body Material Aluminium

---

IP Rating 20 IP

---

Diffuser Material Polycarbonate

---

<b>Nominal Product Length</b>	40 mm
<b>Nominal Product Width</b>	40 mm
<b>Nominal Product Height</b>	21 mm
<b>Cut-out</b>	35mm mm
<b>Weight</b>	0.25 kg

## Packaging

<b>Packaging Inner Length</b>	200 mm
<b>Packaging Inner Width</b>	90 mm
<b>Packaging Inner Height</b>	45 mm

## Standards and Approvals

<b>Manufactured In Accordance To</b>	EN 60598-1 EN6058-2-22
<b>CE Mark</b>	YES
<b>UKCA Mark</b>	YES
<b>WEEE Symbol</b>	YES
<b>Accredited Members</b>	LIA, ISO9001